

Rolling FS Sails

First - Keep the battens IN the sails. Report any missing or broken battens (replace them if you know how).

Step #1 lay the mainsail down (watch out for fire ants!)

Step #2 Lay the jib on the main with the tack corners together (corners with the sail maker's label) and the Luff edges together. "Tack to Tack; Luff to Luff"

Step #3 Lay the jib sheets across the sails parallel to the battens

Step #4 Fold the head of the main over the first batten


Step #5 Fold the Clew of the main as shown

Step #6 Tightly roll the sails up from the head to the foot. Roll PARALLEL to the battens!


Step #7 Place a sail tie around the center of the rolled sail to keep it together

Step #8 Place the sail in the sail bag. Make sure the Sail Number (usually written on the sailmaker's label) matches the number on the sail bag.


NOTE ON WET SAILS/SHEETS– If the sails are wet, hang them up to dry. If only the sheets are wet, let them hang out of the end of the rolled-up sail.

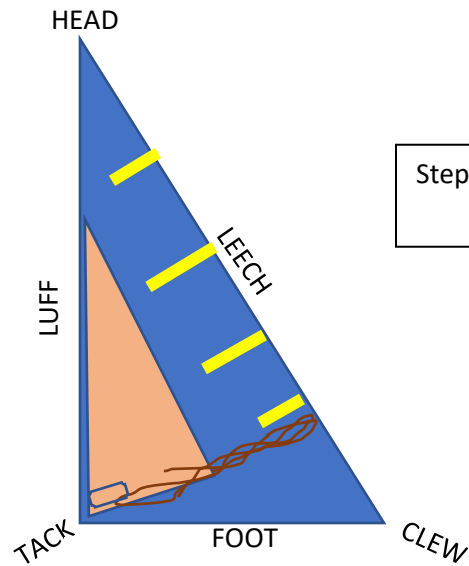

Steps 1-2-3

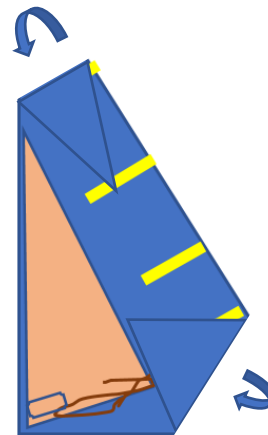

Steps 4 & 5

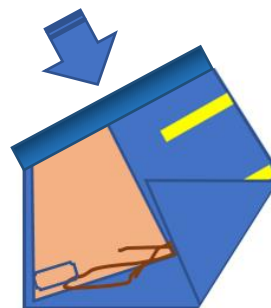

Steps 6

Steps 7 & 8

